



## *ANC Storm Valve*

Weatherford's ANC storm valve is run above the DLT compression-set service packer or CSTD storm packer to isolate the tubing below the packer for disconnection during a weather emergency or surface-equipment repair.


The running string is disconnected by 15 left turns, and then the valve closes automatically. This quick, safe, cost-effective well closing requires no tubing pulling. The valve has an expandable plug that provides through-bore access for circulation or wireline passage. After the string is reconnected, the valve opens automatically to equalize pressure for packer retrieval.

### *Applications*

- Weather emergencies
- Wellhead repair

### *Features, Advantages and Benefits*

- The rugged alloy-steel construction ensures dependability.
- The simple, field-proven design eases valve operation and redressing.
- The expandable plug provides through-bore access for circulation and wirelines.
- The valve equalizes automatically during string reconnection, enabling fast packer retrieval.

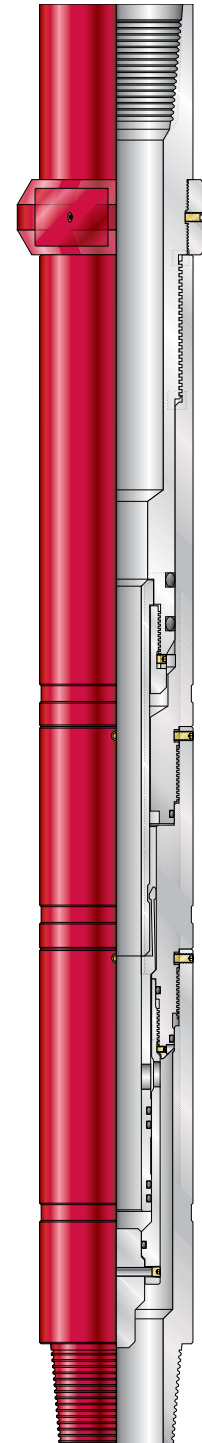



## *ANC Storm Valve*

### *Specifications*

<b>Size (in./mm)</b>	<b>Maximum OD (in./mm)</b>	<b>Minimum ID (in./mm)</b>	<b>Standard Thread Connection (in.)</b>	<b>Product</b>
4-3/4 120.7	4.750 120.65	1.490 37.85	3-1/2 IF <sup>1</sup>	682-10-015
6-1/8 155.6	6.125 155.58	2.000 50.80	4-1/2 IF	682-20-018

<sup>1</sup>Internal flush