



SlickPump™ Setting Tool


Weatherford's patent-pending *SlickPump* tool is a downhole, hydraulic pump-setting tool designed to run on various types of wireline.

Applications

- Nonexplosive setting of packers, plugs, and cement retainers normally conveyed with electric line
- Nonexplosive actuation of normally conveyed, electric line tools that require pressure to actuate

Features, Advantages and Benefits

- The setting tool eliminates the need for explosives, battery packs, and timers, improving safety, transportability, and reliability.
- Actuation by reciprocation enables use on slick line, braided line, or heavy-duty wireline, saving costs in comparison with electric line operations.
- Hydraulic setting pressures capable of up to 5,000 psi (34,474 kPa) can be achieved, enabling the setting of hydraulic packers, plugs, or hydraulic devices.

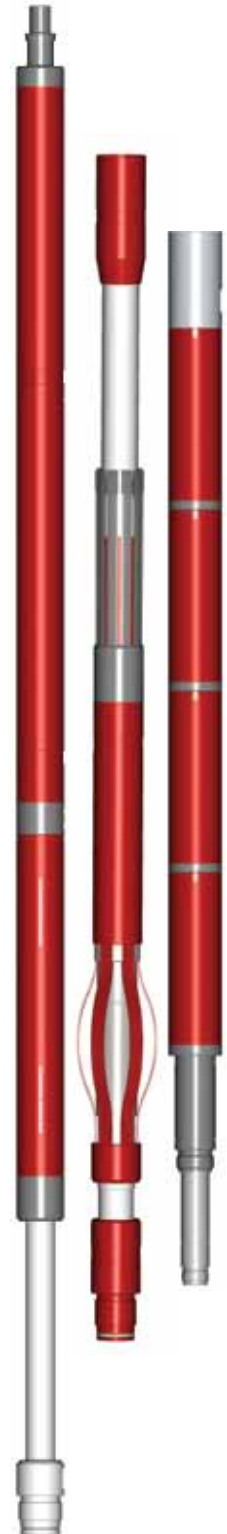



SlickPump™ Setting Tool

Specifications

Tubing		Tool OD (in./mm)	Overall Length (in./mm)	Standard Thread Connection Sucker Rod (in.)
OD (in./mm)	Weight (lb-ft/N·m)			
2-3/8 60.33	4.00 to 4.70 5.40 to 6.30	1.75 44.45	191.40 4,861.56	5/8
2-7/8 73.03	6.40 to 7.90 8.60 to 10.70	2.15 54.61	194.40 4,892.04	5/8
3-1/2 88.90	9.20 to 12.70 12.40 to 17.20	2.56 65.10	198.90 5,006.34	5/8
4-1/2 114.30	9.50 to 13.50 12.80 to 18.30	3.63 92.20	261.60 6,644.64	1-1/8
5 127.70	11.50 to 15.00 15.50 to 20.30	4.19 106.43	261.60 6,644.64	1-1/8
5-1/2 139.70	14.00 to 23.00 18.90 to 31.10	4.50 114.30	254.80 6,471.90	1-1/8
7 177.80	17.00 to 38.00 23.00 to 51.50	5.72 145.29	254.80 6,471.90	1-1/8