



COROD® D-Grade Carbon Steel (D/DR) Continuous Rod

Weatherford's COROD D-grade carbon steel (D/DR) continuous rod is designed for medium-load reciprocating-rod and rotary-rod pumping in wells that are noncorrosive or mildly corrosive but effectively inhibited. This product is available in multiple round and semi-elliptical sizes to suit a wide range of applications.

COROD continuous rod provides a superior alternative to conventional sucker rods. Unlike conventional sucker rods, which are coupled every 25 or 30 ft (7.6 or 9.1 m), COROD continuous rod requires couplings only at the top and bottom of the rod string, regardless of well depth. This innovative solution reduces pin and coupling failures by decreasing the number of threaded connections, thereby minimizing the potential for rod string failures and costly well interventions. With more uniform contact loads and a lighter weight that reduces torque and power requirements for rotary-based applications, COROD continuous rod also extends the lifespan of tubing. Installation is quick, and Weatherford offers a full array of field servicing options.



Applications

- Rotary (progressing cavity pumping) systems
- Reciprocating-rod-lift systems

Features, Advantages and Benefits

- Fewer threaded connections on the rod string reduce the potential for pin and coupling failures as well as the need for costly well interventions.
- The uniform body design evenly distributes contact loads over the entire rod, reducing the severity of tubing and rod wear.
- The large annular space minimizes pressure losses.
- The rod strings are lighter than conventional sucker-rod strings, reducing the amount of weight on the service unit.



COROD® D-Grade Carbon Steel (D/DR) Continuous Rod

Specifications

Minimum tensile strength (psi/ <i>MPa</i>)	115,000 790
Minimum yield strength (psi/ <i>MPa</i>)	85,000 590
Maximum average hardness	Rockwell: 28 Brinell: 271
Heat treatment	Quenched and tempered

Chemical Composition

Note: all elements in % by weight

Material	Carbon	Manganese	Phosphorus Maximum	Sulphur Maximum	Silicon	Nickel Maximum	Chromium Maximum	Molybdenum Maximum	Aluminum	Titanium	Copper Maximum
1536 M	0.31 to 0.35	1.10 to 1.30	0.015	0.010	0.15 to 0.35	0.25	0.25	0.050	0.020 to 0.050	—	0.35



COROD® D-Grade Carbon Steel (D/DR) Continuous Rod

Product Types

Round


(Rotary and reciprocating applications)



COROD Number	COROD Size (in./mm)	Minimum Weight (lb/ft, kg/m)	Minimum Area (in.²/mm²)	Maximum Torque (ft lb/N•m)
DR 8.5	1-5/32 29.4	3.57 5.32	1.050 678	1,490 2,020
DR 6	1 25.4	2.67 3.98	0.785 507	955 1,295
DR 4	7/8 22.2	2.04 3.05	0.601 388	640 868
DR 3	13/16 20.6	1.76 2.63	0.518 335	500 678

Semi-Elliptical

(Reciprocating applications)

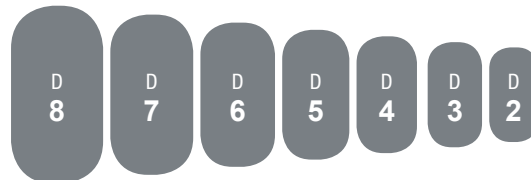

COROD Number	COROD Size (in./mm)	Minimum Weight (lb/ft, kg/m)	Minimum Area (in.²/mm²)
D 8	1-1/8 28.6	3.38 5.03	0.994 642
D 7	17/16 27.0	3.01 4.49	0.886 572
D 6	1 25.4	2.67 3.98	0.785 507
D 5	15/16 23.8	2.35 3.50	0.690 445
D 4	7/8 22.2	2.04 3.05	0.601 388
D 3	13/16 20.6	1.76 2.63	0.518 335
D 2	3/4 19.0	1.50 2.24	0.442 285