

REAL RESULTS

Production Up 100%: Only 3 of 7 Zones Acid Stimulated Using Weatherford's HD Jet Frac[™] Zonal Isolation Straddle Packer

Objectives


- Isolate identified zones, and acid-stimulate.
- Stimulate at 10 bbl/min, using a stimulation vessel.
- Target three zones in one run.

Results

- Successful isolation and acid stimulation of the three zones in one run.
- Zonal stimulation at 10, 10 to 14, and 10 to 16 bbl/min.
- 100 percent production increase.

Value to Client

- Production increased by 100 percent (1,500 BOPD) after stimulation of only 3 of the 7 well zones.
- Zonal isolations improved return on investment.

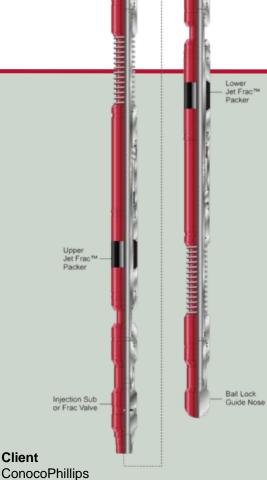

ConocoPhilli

Location Norway

Formations Chalk

Depth 13,085 to 13,365 ft (3,988 to 4,074 m)

Pore Pressure 4,230 psi (292 bar)

Well Type Oil and gas producer

Liner 5-1/2 in.

Number of Wells

Products/Services

- Thru-tubing services
- Jet Frac packer

Weatherford International Ltd. 515 Post Oak Blvd., Suite 600 Houston, Texas 77027 USA Tel: 713-693-4000 weatherford.com

ConocoPhillips Kjetil Ormark, Technical Specialist + 47 5202 1887 kjetil.ormark@conocophillips.com Weatherford Helge Halvorsen, Engineer + 47 5181 4535 helge.halvorsen@weatherford.com Weatherford products and services are subject to the Company's standard terms and conditions, available on request or at weatherford com. For more information contact an authorized Weatherford representative. Unless noted otherwise, trademarks and service marks herein are the property of Weatherford. Specifications are subject to change without notice. Weatherford sells its products and services in accordance with the terms and conditions set forth in the applicable contract between Weatherford and the client.